

SINGLE-COMPONENT POLYURETHANE
FOAM AIR SEAL AROUND THE FRAME

SEALANT AND COMPRESSIBLE
FOAM BACKER ROD

METAL FURRING

GYPSUM WALLBOARD

WOOD SILL

GROUT

VERTICAL REINFORCING
SPECIFIED BY ENGINEER

CAVCLEAR MASONRY MAT OR
CAVCLEAR INSULATION SYSTEM
INSTALLED FULL-HEIGHT BEHIND
ALL MASONRY IN CAVITY.
(NOTE: BEYOND BRICK
RETURN AT JAMB)

GLASS DOOR ASSEMBLY

SEALANT


EXTEND ROOFING MEMBRANE AND
FLASHING UNDER DOOR FRAME

EXTRUDED ALUMINUM SILL

PREFINISHED GALVANIZED
STEEL FLASHING

SLOPE DOWN

CONCRETE OR
MASONRY UPSTAND

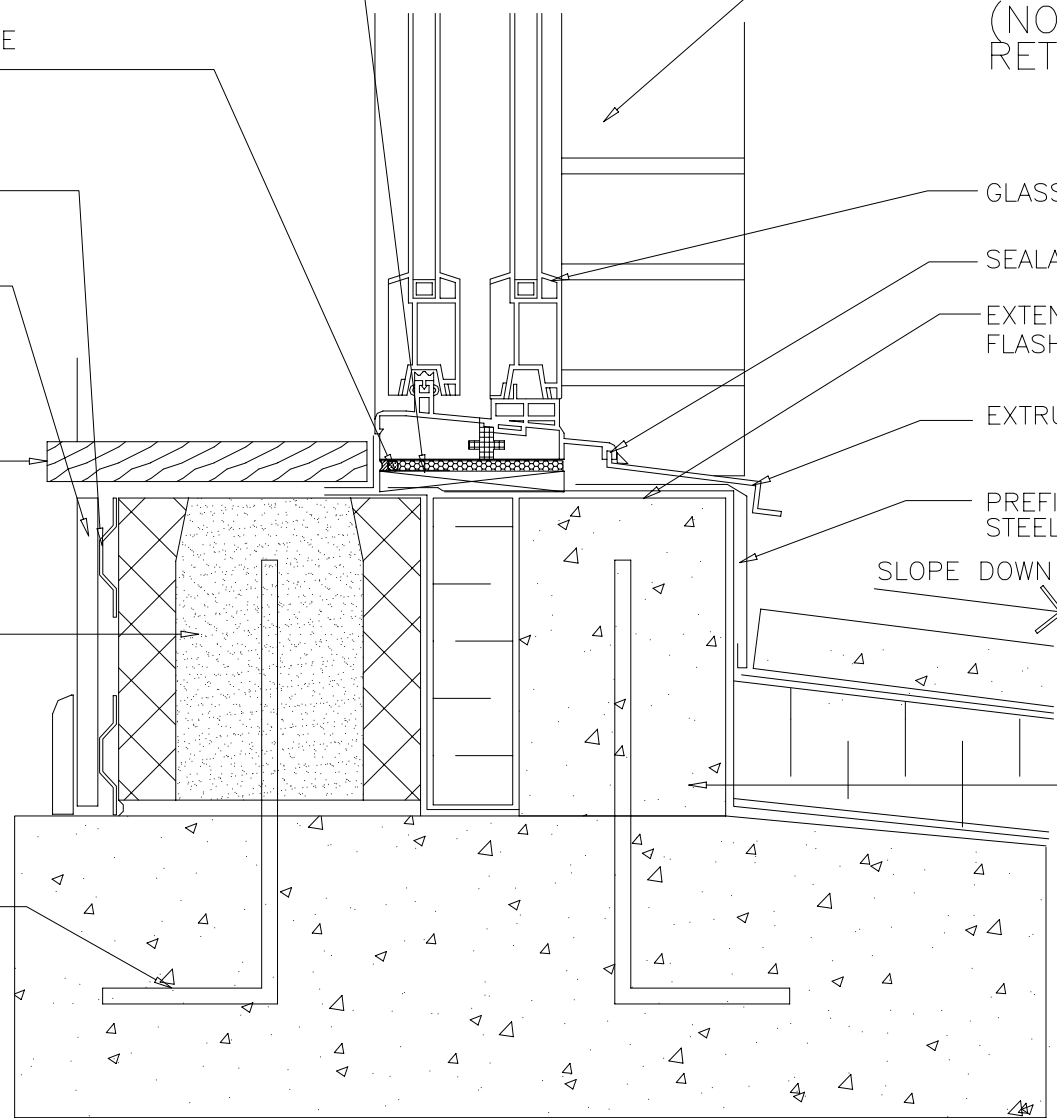

DOOR ABOVE LOW SLOPE ROOF DETAIL